



कृषि मंत्रालय (कृषि अनुसंधान एवं शिक्षा विभाग), भारत सरकार  
 भाकृअनुप - केन्द्रीय तटीय कृषि अनुसंधान संस्थान  
 भारतीय कृषि अनुसंधान परिषद  
 एला, ऑल्ड गोवा - 403 402 (भारत)  
 Ministry of Agriculture (Department of Agricultural Research and Education), GOVERNMENT OF INDIA  
**ICAR- CENTRAL COASTAL AGRICULTURAL RESEARCH INSTITUTE**  
 Indian Council of Agricultural Research  
 Ela, Old Goa - 403 402 (INDIA)


An ISO 9001:2008 Certified Institute



F. No. 4(4)/Misc.Farm Works/2019-Works

Date: 05-05-2020

To,

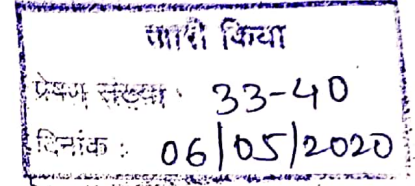

Sub: Inviting tender for Work "Structural repair & maintenance of the Farm Office." at  
 ICAR- CCARI, Old.Goa - reg.


Sir,

Sealed tenders for execution of works as per the specifications given in the abstract attached are invited by the Director, ICAR – Central Coastal Agricultural Research Institute, Ela, Old Goa from the contractors so as to reach this Office on or before **20-05-2020** by 3.00 p.m. The sealed cover containing the tenders should be superscribed as "Structural repair & maintenance of the Farm Office." at ICAR- CCARI, Ela Old Goa due on **20-05-2019** vide reference No. 4(4)/Misc.Farm.Works/2019-Works dated 05-05-2020.

Abstract Attached (Annexure A)

P.T.O

1. The rate for the work should be quoted as per GSR & Labour Cess as applicable against each description of work as per "Annexure A" and should indicate the total of each description work and Grand Total, failing which the quotation will be rejected.
2. Rates quoted should be inclusive of incidental charges including all the applicable legal charges. GST, wherever applicable, should be shown separately.
3. The tender should be dropped in the Tender Box kept for the purpose at this Institute.
4. The tender will be opened by the Committee for tenders in Works constituted for the purpose at ICAR - CCARI, Ela Old, Goa on 21-05-2020 at 3:30 pm in the presence of tenderers, if any.
5. The tender should be accompanied with a Demand Draft of Rs. 5000/- ( Rupees FiveThousand only ) as Earnest Money Deposit (EMD) drawn in favour of ICAR Unit, ICAR - CCARI, payable at Goa, which may be recorded on the sealed cover that EMD for Rs. 5000/- is enclosed.
6. The EMD will be returned to the UNSUCCESSFUL tenderers, after finalization of the contract, for which application for refund of EMD and pre-receipt should be enclosed along with the quotation.
7. Successful tenderers have to deposit Security Money @ 10% of the total cost of the work involved in deal before starting the work for the period of contract towards proper performance of contract which will be released after one year of successful completion of works and which will be treated as guarantee for successful performance of completed works.
8. No farm implements will be provided from this Office to the Contractors for the work.
9. Payment will be made by mode of e- payment in favour of the Contractor/party after completion of the work satisfactorily and on production of your pre-receipted bill. The following details may be intimated i) Account holder's name ii) type of account and account no. iii) Name of bank and address. iv) RTGs code no, of bank. V) IFSC No. of bank & MICR Code.
10. The contractor shall indemnify and keep indemnified ICAR - CCARI, GOA from any claims, loss or damages that may be caused to it on account of any failure to comply with the obligations under various laws of the Central or the State Government. In case of any dispute, the decision of the Director, ICAR-CCARI, Goa shall be final and binding on the contractor.
11. The tender should be signed by the Contractor/Party with name and full address and the tender received without the same will not be accepted.
12. The tender should be provided on the firm's letterhead in a sealed envelope along with the following:
  - a) Demand Draft of Rs. 5000/- (EMD).
  - b) Registration Certificate with CPWD/Railways/State PWD.
  - c) Copy of GST Registration Certificate.
  - d) Copy of Permanent Account Number (PAN).
13. For clarification if any, contact- Estate Officer/Smt. Madina Sollapuri, Sr. Technical Officer (Civil).
14. The right to accept or reject any or all tender without assigning any reason is reserved by the Director, ICAR - CCARI, Old Goa.

  
05/05/2020  
Administrative Officer



Name of the work:- "Structural repair & maintenance of the Farm Office" at ICAR- CCARI, Ela, Old Goa.

Estimated cost: Rs. 1,26,855/-

Sr. No 1	Description of Work 2	Units 3	Quantity 4	Rate 5	Amount 6
1	Removing old loose bottom or side cover of RCC slab, beam, column etc, rubbing surface of concrete steel using steel wire brush & applying 2 coats of alkaline rust converting primer (feovert) after a waiting time of 6 hrs. between coats & then applying another anti corrosion protective coating system for reinforcement bars (IPNet-RB) Conforms to IS-277- Part-I (Pull out Test) ASTM-C882-87 & plastering on the fresh bond coat with Polymer Modified Mortar (monobond) with 20mm C.M. 1:3 & finishing coat of 6mm C.P. 1:3 incl. coat of transport etc. as per dir of EIC. All the chemicals will be of Krishna CONchem Products PVT. Ltd. or Equivalent	Sq.m	15.000		
2	Crack filler for plasters, IPS, cement sand screeds & non-structural cracks. Do not open the cracks, clean the cracks so as to free them from oil, dust, loose particles etc. Moisten the surface with water, fill cracks with EPCO-ACR using Spatula or a putty Knife, While applying avoid formation of cavity or bubbles. After filling allow the surface to dry for at least 24 hrs. Apply in layers at 24 hrs. interval. If the depth of the cracks is more than 10mm. incl. cost of scaffolding transport etc. as per dir of EIC. All the chemicals will be of Krishna CONchem Products Pvt. Ltd. or Equivalent	Sq.m	30.000		
3	12mm cement plaster 1:3 (1 cement : 3 fine sand)	Sq.m	35.000		
4	Repairs to plaster in patches of 2.5 Sq.m and under including cutting the patch in proper shape and preparing and plastering the surface of the walls complete including disposal of rubbish to the dumping ground within 50m lead with cement mortar 1:4 (1 cement : 4 fine sand)	Sq.m	20.000		
5	Providing and fixing colour coated galvuvlim roofing sheets of 0.5mm thickness including all the accessories but excluding the cost of purnils, rafters, trusses etc. complete as per the direction of the Engineer in charge.	Sq.m	35.000		
6	Steel work welded (SAIL, TATA, VIZAG & using electrodes of Ador or ES4B or Deh Secheron make only) in built up sections trusses and framed work including cutting, hoisting, fixing in position and applying priming coat of red lead paint. b) In tees angles flats and channels	Qtl.	3.600		
7	Wall painting (two or more coats) with plastic emulsion paint of approved brand and manufacture on old work to give an even shade.	Sq.m	50.000		